




- easy and intuitive installation
- just 2 pre-assembled components
- horizontal module installation with 20° tilt angle
- single-point attachment to roof, ballast or rails
- designed according DIN EN 1991-1 Eurocode
- approved for wind up to 188 km/h and snow load up to 6 kN/m<sup>2</sup>
- integrated grounding option

**Product launch**

**Q1  
2016**



**150 kWp  
on one  
pallet!**

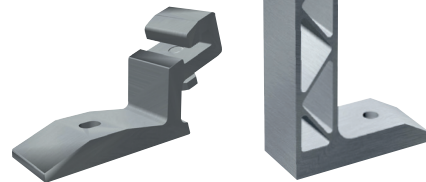

**Pandja**

www.pandja.com  
info@pandja.com  
Phone +356 270 40 452